

E-Z RELEASE™

MOUNTING BRACKET AND PUMP

PATENT No. 5286195


MOUNTS UNDERWATER AT BASE OF TRANSON

Mount pump bracket underwater as deep and near to the center of transom as possible without getting near source of possible turbulence. Use bracket for template and hold it flush with the bottom of the boat to mark the four screw-hole positions. Drill 9/16" holes, fill them with bedding compound, and secure the bracket with provided screws.


Water is pumped up through the filter slots and supplied to the bail tank or bail bag. All pumps have 6-1/2 foot wire leads that connect to a 12-volt power source with brown lead going to positive. Install fuse in this lead with the proper size, as designated on reverse side, either in-line or in your boat's electrical panel.

EZ-300, 500, and 700 accept 3/4" ID hose. EZ-1100 has a garden hose fitting outlet. Hose and wires can be positioned against transom with releasable ties from installation kits featured below.

Slide Pump Assembly Into Mounting Bracket Until It Snaps And Seats. Use Flex-Tab To Slide Pump Out Of Bracket With Ease.

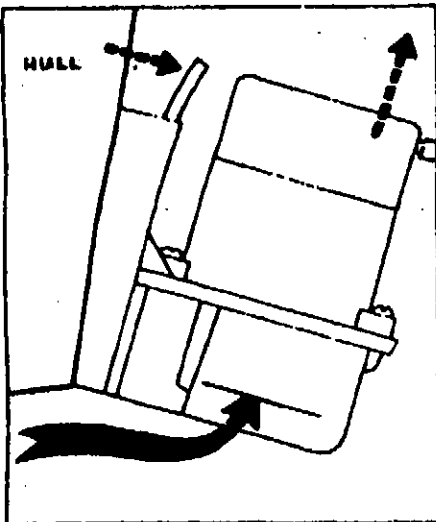

Mounted underwater at the base of the transom, the pump housing will pick up water when the boat is underway. The pump may not be needed if the boat is running fast enough.

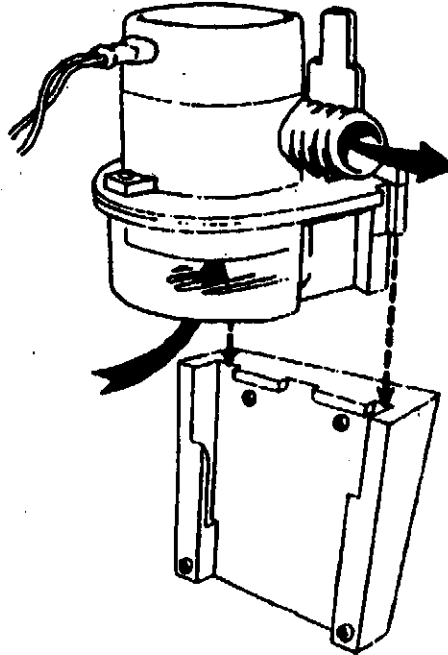

As simply as it slides downward and snaps into place, the pump assembly is easily removed from bracket for cleaning or storage by pushing flex-tab outward and pulling pump up and out of bracket.

OPTIONAL ACCESSORIES:

AC-5 — Thru-transom connector with garden hose fittings on each side, plus cap.

AC-16 — INSTALLATION KIT - includes 90° "L" hose barb, two releasable ties in cradle brackets for securing hose and wires to transom, and a 3/4" nylon hose nipple with female garden hose fitting for attaching hose to tank or bail bag.

AC-17 — AC-16 assembly (above), with seven feet of 3/4" ID hose.