

AQUAWORLD LIVEWELLS


THRU-HULL BAIT & WASH DOWN PUMP

Compact pump with 3/4" male pipe threads. Mount directly into thru-hull shut-off valve housing (no nipple needed).

- * Completely submersible
- * Low Amperage Draw
- * Non-corrosive
- * Silent Running
- * Ignition Protected
- * Water Cooled 12 volt Motor
- * Long Lasting Continuous Operation
- * No Burn Out If Run Dry
- * Airlock Resistant
- * 12 Month Warranty



These reliable centrifugal pumps are non-self priming and must be mounted below the boat's water level. The deeper mounted, the more efficient they will be. Mounting the pump horizontally by use of a 90° male/female elbow will put the pump lower in the bilge, and with the outlet facing upward, will actually help prevent airlocks.

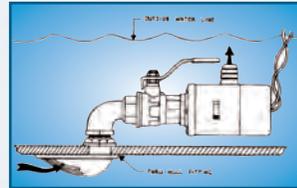

Model#:	Gallons Per Hour	Tank Capacity Max. Gal.	Amp. Draw
TH-360	360	up to 22	2.5
TH-500	500	22-36	2.5
TH-700	700	35-45	4
TH-1100	1100	40-50	5

The AQUAWORLD Reverse-Flow System

Many baitfish are very fragile and difficult to keep healthy and lively in an enclosed bait container. A constant flow of water is needed to provide oxygen, but if the flow is too strong, as it is in most bait tanks, the baitfish become exhausted and die. Furthermore, tanks that fill at the bottom and overflow at the top push loose scales and residue into the path of circling bait, clogging their gills and ultimately suffocating them.

AquaWorld Products' **patented**, self-flushing live bait containers are specially designed to overcome the bait killing problems inherent to other ordinary tanks. The unique, **REVERSE-FLOW** containers fill near the top, and circulate clean water downward through the bait, pushing scales and residue to the bottom and out. Without debris in the water, you will not lose baitfish to suffocation, and with the tank's constant flow, they won't become exhausted. In addition, there are no obstructions in the path of swimming bait to bruise and weaken them.

The "**REVERSE-FLOW SYSTEM**" completely revolutionized live bait tank design, made other types of bait tanks obsolete, and resulted in AquaWorld Products becoming the leading producer of live bait tanks and livewells in the world!



Reverse-Flow Livewell Systems

"Clean Water
Makes The
Difference"



Executive offices located at
361 Neptune Avenue, W. Babylon NY
1-800-275-2436
631-661-8209 (fax)

WWW.AQUAWORLD-PRODUCTS.COM

DISTRIBUTED BY

www.aquaworld-products.com

AQUAWORLD LIVEWELLS


ULTRATANKS

These self-cleaning bait tanks, are made from rugged UV-stabilized SURPASS® resin which give years of use. All tanks feature the **patented Reverse Flow** water circulation system, a snap-in cutting board lid, and a molded-in light dome (see "Tank accessories for bait lights) and tank mounting brackets. The Ultratanks are **space savers**, compact enough to fit in cockpits or on swim steps.



Model #:	Gallons	L x W x H	Weights ❖ E/F
UT-13	13	22 ^{1/4"} x 13 ^{3/4"} x 17"	12 - 104
UT-17	17	23 ^{3/4"} x 15 ^{1/2"} x 17 ^{7/8"}	15 - 136
UT-23	23	22 ^{1/2"} x 13 ^{1/2"} x 25 ^{3/4"}	18 - 184
UT-27	27	32 ^{1/4"} x 17 ^{3/8"} x 17 ^{7/8"}	21 - 216
UT-29	28.5	27 ^{1/4"} x 15 ^{3/4"} x 22"	22 - 232
UT-38	38	27" x 16" x 28 ^{3/4"}	28 - 304
UTR-14	14	Round x 16 ^{1/2"} x 21 ^{5/8"}	13 - 112
UTR-24	24	Round x 23" x 18"	19 - 192
UTR-30	30	Round x 23" x 24"	22 - 240
UTR-50	50	Round x 29" x 24"	28 - 400

❖ E: Empty Weight F: Full Weight

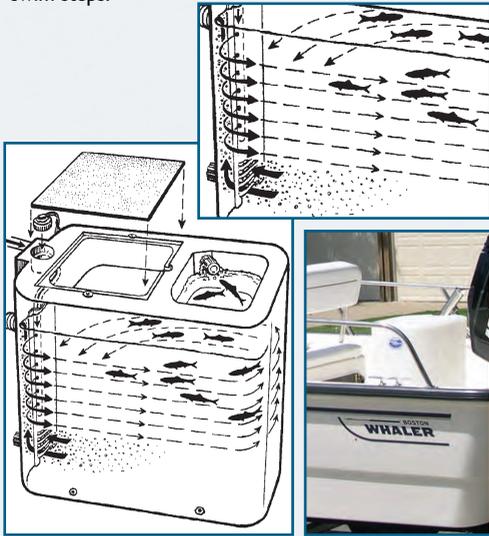

TRADITIONAL BAITWELLS

AquaWorld Bait Tanks are molded from rugged UV-stabilized SURPASS® resin which give years of use and added strength. Corners are rounded so bait cannot be trapped. As an added value, recessed cutting boards are made to fit flush in the top of each baitwell. Traditional Bait Tanks are not plumbed and AquaWorld recommends using the AC-7 Complete Water Pickup and Pump System Kit with these tanks.



MODEL 22
85-1706



MODEL 36
84-1470



HIGH PROFILE
93-1334



TRANSOM BW
93-1333

All Aquaworld Tanks are molded of SURPASS® resins

TANK ACCESSORIES



Model #:
AC-3

E-Z RELEASE MOUNTING PADS
AC-3. Four low profile, black anodized 1/4" aluminum pads mount permanently to deck. AC-3 pads mount to the AC-4 brackets allowing for easy removal and installation of the tank. Kit includes 4 pads, 4 bolts and 4 washers.



Model #:
AC-4

MOUNTING BRACKETS
AC-4. 4 x 90° stainless steel L-Brackets with bolts. AC-20. Combines the AC-3 and AC-4 kits.



Model #:
AC-10

BAIT-LITE
AC-10. Detachable 12-volt water resistant light that attaches to Ultratanks.



Model #:
AC-5

THRU-TRANSOM HOSE CONNECTOR
AC-5. Thru-Transom Hose Connector with garden hose threads and cap. Fits up to a 4" hull.



Model #:
AC-11 &
AC-12

TANK ATTACHMENTS
AC-11. Garden hose thread x 5/8" hose barb and clamp.
AC-12. Garden hose thread x 3/4" hose barb and clamp



Model #:
AC-8

AQUA-SCOOP
AC-8. Aqua-Scoop with kelp filter, bracket and screws.



Model #:
AC-7

COMPLETE WATER PICKUP & PUMP SYSTEM
AC-7. 500 GHP Pump, priming bulb, inlet valve assembly, 7 feet of 5/8" hose, hose clamp, Aqua-Scoop with kelp filter, Aqua-Scoop bracket and screws. For Use with traditional bait tanks. Not for use with Ultratanks.



E-Z RELEASE MOUNTING BRACKET & PUMP (patented)

With the Aqua-World **E-Z Release Mounting Bracket** there is no priming bulb needed and no noise! Simply mount the E-Z Release Bracket underwater on the transom, flush with the bottom of the boat.

The submersible pump, in a cup assembly, slides into the bracket; snapping into a locking position. The pump is easily removed by pushing the Flex-Tab forward and pulling the pump out of the bracket.

Water is pumped through the filter slots and supplied directly to the bait tank or bag above. Pump includes a 6 foot wire leads and accepts 3/4" ID hose. (EZ-1100 accepts 1 1/8" ID hose or adapts to standard garden hose thread with included snap-on fitting.)



Model #:	GPH	Tank Cap. Gal.	Amp. Draw
EZ-360	360	20	2.5
EZ-500	500	30	2.5
EZ-700	700	45	4
EZ-1100	1100	60	5



VISIT OUR WEBSITE FOR A COMPLETE LIST OF SIZES & SPECS.

WWW.AQUAWORLD-PRODUCTS.COM